



Collection: BRIVE

Finish*:



CP - Chrome

Main features:



Features

- **MATERIAL:** Metal
- **NORMS AND REGULATIONS:** NF - ECAU : E1/1 C3 A2 U3 - ACS : 19 ACCLY 836
- **CONNECTION:** With wall connectors
- **SHOWER TAPS-WATER/ENERGY SAVING:** Yes
- **SINGLE-LEVER TAPS:** Thermostatic
- **SHOWER TAPS-SAFETY STOP:** 38°C
- **SHOWER TAPS-HANDSHOWER FLOW:** 10 L/min
- **NUMBER OF SPRAYS:** 5

- **INSTALLATION TYPE:** Wall-mount
- **FLOW RATE:** 10 l/mn
- **TYPE:** Single-lever
- **WITH OR WITHOUT BRASSWARE:** With
- **SHOWER TAPS-DIVERTER:** Integrated
- **SHOWER TAPS-MAXIMUM TEMPERATURE:** 50°C
- **HOSE TYPE:** Smooth, anti-twist, metal look
- **WARRANTY DURATION (YEARS):** 5


Consumer benefits

- **WATER EFFICIENCY:** Flow controls up to 10L/min included in the handshower and the showerhead
- **INCREASED ANTI-SCALDING SAFETY:** Automatic water stoppage in case of cold water cutoff and temperature limited to 50°C
- **SIMPLE FUNCTIONALITY:** Diverter built into flow handle
- **THERMOSTATIC CARTRIDGE:** Allows precise temperature adjustment and rapid regulation in case of pressure variation, maintaining constant temperatures.
- **SHOWERING ENJOYMENT:** Showerhead providing excellent body coverage (Ø200) and 5 different sprays to select your shower experience

Installation benefits

- **NF COLUMN:** Fully NF-certified column, guarantee of quality and environmental compliance
- **WATER HEATER COMPTABILITY:** Compatible with any hot water heater of at least 18kW.
- **ADJUSTABLE ARM:** Arm height can be adjusted during installation.

Technical drawing

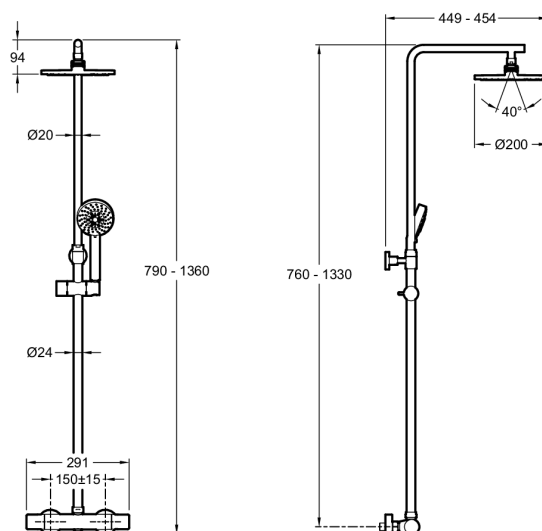

Product Specification: Thermostatic shower column. E24322. Collection: BRIVE. MATERIAL: Metal. INSTALLATION TYPE: Wall-mount. NORMS AND REGULATIONS: NF - ECAU : E1/1 C3 A2 U3 - ACS : 19 ACCLY 836. FLOW RATE: 10 l/mn. CONNECTION: With wall connectors. TYPE: Single-lever. SHOWER TAPS-WATER/ENERGY SAVING: Yes. WITH OR WITHOUT BRASSWARE: With. SINGLE-LEVER TAPS: Thermostatic. SHOWER TAPS-DIVERTER: Integrated. SHOWER TAPS-SAFETY STOP: 38°C. SHOWER TAPS-MAXIMUM TEMPERATURE: 50°C. SHOWER TAPS-HANDSHOWER FLOW: 10 L/min. HOSE TYPE: Smooth, anti-twist, metal look. NUMBER OF SPRAYS: 5. WARRANTY DURATION (YEARS): 5.